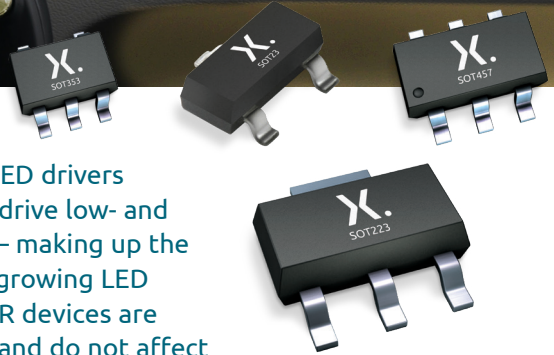


# Constant current LED Drivers

Cost-efficient, reliable and easy to use



Nexperia's linear constant current LED drivers are a simple and robust solution to drive low- and medium-power LEDs up to 250 mA – making up the vast majority of applications in the growing LED market. The AEC-Q101 qualified NCR devices are easy-to-use, reliable, cost efficient, and do not affect EMC. Available in four package options.



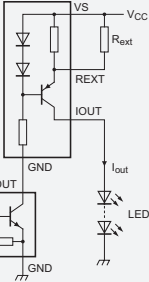


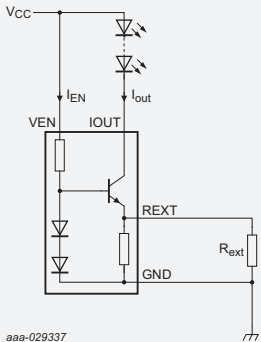


## Features

- › High current accuracy
- › Parallel drivers can be used to increase the current capability
- › High power capability (up to 1250 mW) for increased robustness
- › Supply voltage up to 75 V
- › AEC-Q101 qualified
- ›  $T_j = 150\text{ }^\circ\text{C}$
- › Space-saving and future-proof
- › Easy to implement
- › Multi-sourcing capable

## Applications

- › Constant current source
- › Automotive interior and exterior lighting
  - Door handles
  - Dashboard
  - Number plate light
  - Indicators
  - Rear lights, etc.

# Product range

Configuration	Current (mA)	Supply Voltage (V)	Enable	Ptot (mW)	Package	Size (mm)	Type
PNP (High side)  <small>006aaa025</small>	10	18	GND	480		2.9 x 1.3 x 1.0	NCR401T
	20						NCR402T
PNP (High side)  <small>aaa-019594</small>	10 – 65	40	GND	750		2.9 x 1.5 x 1.0	NCR401U
	20 – 65						NCR402U
	50 – 65						NCR405U
	0.015 – 50	75	335		2.0 x 1.25 x 0.95	PSSI2021SAY	
NPN (Low Side)  <small>aaa-029337</small>	10 – 250	16	Vcc	750		2.9 x 1.5 x 1.0	NCR320U
			Logic Level				NCR321U
	10 – 150	40	Vcc	NCR420U			
			Logic Level	NCR421U			
	10 – 250	16	Vcc	1250		6.5 x 3.5 x 1.65	NCR320Z
			Logic Level				NCR321Z
	10 – 150	40	Vcc				NCR420Z
			Logic Level				NCR421Z

Product specs and datasheets available at: [www.nexperia.com/led-driver](http://www.nexperia.com/led-driver)

© 2019 Nexperia B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

**Date of release:**  
August 2019